



# Versilon<sup>®</sup> BCS Hose


## STAINLESS STEEL BRAIDED HELICALLY CONVOLUTED INNER TUBE ANTI-STATIC FLUOROPOLYMER HOSE

Saint-Gobain's Versilon<sup>®</sup> BCS hose is constructed with a black electrostatic dissipating conductive PTFE convoluted inner tube and reinforced with high tensile strength 304 stainless steel braid. The convoluted inner tube is low profile and helically formed to promote drainage. This design enables superior flexibility and vacuum resistance.

Versilon<sup>®</sup> BCS hose does not absorb color and odor, cleans easily with SIP, CIP and can be autoclaved. It is also non-stick and noncontaminating.

### Typical Applications

- Chemical transfer
- Steam (tire press) transfer
- Solvent transfer
- Acid lines
- Adhesive transfer
- CIP lines

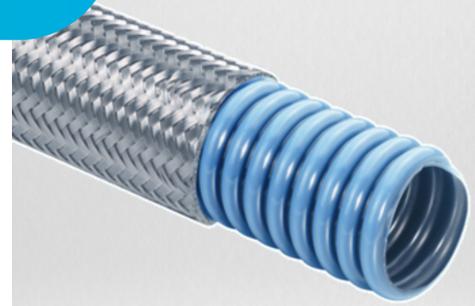

### Features and Benefits

Electrostatic dissipating conductive PTFE inner tube:

- Superior flexibility and vacuum resistance
- Convoluted inner tube is low profile and helically formed to promote drainage
- Does not absorb color or odor
- Non-stick, non-contaminating
- Easy to clean (SIP, CIP, autoclavable)

### Regulatory Compliance

- Compliant with MIL-DTL-27267C



## Versilon® BCS Hose Specifications

Part Number	Inside Diameter		Outside Diameter		Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius		Vacuum Hg @ 70°F		Weight	
	(in)	(mm)	(in)	(mm)	(psi)	(MPa)	(psi)	(MPa)	(in)	(mm)	(in)	(mm)	(lb/ft)	(kg/m)
2706BCS00	3/8	9.5	5/8	15.9	2,200	15.17	8,800	60.67	1.75	44.5	29.9	760	0.15	0.22
2708BCS00	1/2	12.7	3/4	19.1	1,750	12.07	7,000	48.26	1.75	44.5	29.9	760	0.19	0.28
2712BCS00	3/4	19.1	1-1/8	28.6	1,375	9.48	5,500	37.92	2.25	57.2	29.9	760	0.30	0.45
2716BCS00	1	25.4	1-3/8	34.9	1,000	6.89	4,300	29.65	2.75	69.9	29.9	760	0.40	0.60
2720BCS00	1-1/4	31.8	1-5/8	41.3	750	5.17	3,200	22.06	3.50	88.9	29.9	760	0.50	0.74
2724BCS00	1-1/2	38.1	2-1/8	54.0	650	4.48	2,600	17.93	3.75	95.3	29.9	760	0.63	0.94
2732BCS00	2	50.8	2-1/2	63.5	600	4.14	2,400	16.55	6.50	165.1	5.0	127	0.89	1.32

### ! Important:

**Burst pressure** ratings at ambient 70°F (21°C). See applicable notes below on vacuum/pressure ratings at temperatures other than ambient.

For styles above 2" ID, refer for info on TWOB/TBOB series hose.

**Working Pressure** is given at 70°F; decrease working pressure 1% for every 2°F above 250°F.

**Vacuum Rating** at minimum bend radius (72°F): all sizes up to and including 1-1/2" rated at 29.9" Hg; 2" rated at 5.0 Hg. Decrease vacuum rating 1% for every 2°F above 250°F.

Data given is for straight hose installation.

NOTE: Weights and outside diameter dimensions are nominal. Data given is for hose only. End fitting vs. hose pressure limitations must be considered and the lower of the two ratings must be used on assemblies.

## Construction

Inner Tube:	Black electrostatic dissipating conductive PTFE																
Reinforcement:	High tensile strength 304 stainless steel braid																
Temperature Rating:	-100°F to +450°F -73°C to +232°C																
Minimum Overall Length of Hose Assemblies with Anti-Kink Casing:	3/8" and 1/2" sizes - 24" OAL 5/8" and 3/4" sizes - 36" OAL* 1" size - 36" OAL 1-1/2 size - 36" OAL** 2" size - 48" OAL**																
Maximum Length:	<table border="1"> <tr> <td>3/8"</td> <td>100'</td> <td>1-1/4"</td> <td>100'</td> </tr> <tr> <td>1/2"</td> <td>125'</td> <td>1-1/2"</td> <td>100'</td> </tr> <tr> <td>3/4"</td> <td>100'</td> <td>2"</td> <td>75'</td> </tr> <tr> <td>1"</td> <td>150'</td> <td></td> <td></td> </tr> </table> <p>Maximum length may vary. Length supplied will be based on full coil length in stock ±25% of the order length.</p>	3/8"	100'	1-1/4"	100'	1/2"	125'	1-1/2"	100'	3/4"	100'	2"	75'	1"	150'		
3/8"	100'	1-1/4"	100'														
1/2"	125'	1-1/2"	100'														
3/4"	100'	2"	75'														
1"	150'																

\* Shorter lengths are possible with mini sanitary fittings; consult factory.

\*\* Shorter lengths are possible with same size sanitary clamped ends; consult factory.

## Hose Cover Options

- Anti-kink casing
- Firesleeve/insulating cover
- Heat shrink/rubber cover
- Silicone slip-on cover

**Limited Warranty:** For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



Saint-Gobain Performance Plastics  
210 Harmony Road  
Mickleton, NJ 08056

1-800-435-3992



NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Versilon® is a registered trademark.